

WHEELED ASPIRATORS FOR EXHAUSTED OIL WITH PNEUMATIC PUMP



042-1410-000

Art. 042-1410-000

Wheeled aspirator with pump for drums of 50-60 l

Composed by:

Art.020-1165-000 Air-operated pump **ratio=1:1**


Equipped with the flux adjuster and the vacuum gauge

Art.030-1395-000 4-wheels trolley

Art.044-1479-000 Set 10 standard probes

2 m aspiration - delivery hoses

Art.024-1232-F00 Oil dispensing nozzle flexible end

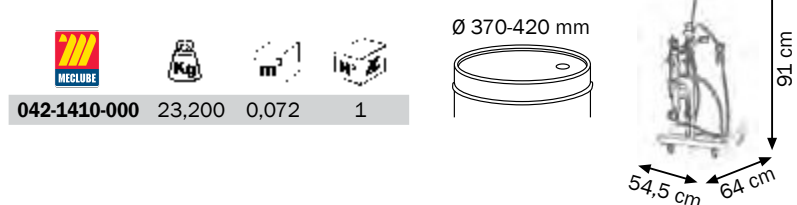

042-1411-000

Art. 042-1411-000

Wheeled aspirator with pump for barrels of 180-220 l

Composed by:

Art.020-1165-000 Air-operated pump **ratio=1:1**

Equipped with the flux adjuster and the vacuum gauge

Art.030-1400-000 4-wheels trolley

Art.044-1479-000 Set 10 standard probes

2 m aspiration - delivery hoses

Art.024-1232-F00 Oil dispensing nozzle flexible end



042-1412-000

Art. 042-1412-000

Air-operated oil suction-drainer 90 l with pneumatic oil pump

Pneumatic air emptying (max pressure 0,5 bar)

Composed by:

Tank capacity 90 l with level indicator

Art.020-1165-000 Air-operated pump **ratio=1:1**

Equipped with the flux adjuster and the vacuum gauge

Recovery basin capacity 20 l

with ergonomic and **swivel 360°** abs funnel

with breakwater grate for drip the substituted oil filters

Art.044-1479-000 Set 10 standard probes

2 m aspiration - delivery hoses



Suitable for the aspiration of exhausted oil and similar from every motor vehicle.

When you inverse the position of the two hoses the aspirator can deliver the aspirated fluids.

Warning: It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.

WALL-FIXING ASPIRATORS FOR EXHAUSTED OIL WITH PNEUMATIC PUMP



Art. 042-1304-000

Wall-fixing aspirator for emptying exhausted oil aspirator/suction-drainer

Composed by:

Art.020-1168-000 Air-operated pump **ratio=1:1**

Equipped with the flux adjuster and the vacuum gauge

Art.025-1265-000 Wall-fixing bracket

Art.910-0700-020 Flex hose Ø 25mm 2m

Art.F94-0540-525 Rubber connection M 3/4" Ø 25mm

Art.F96-0500-005 Quick disconnect coupling female 3/4"

Art.F96-0502-005 Quick disconnect coupling male 3/4"



042-1304-000 23,200 0,072 1

Art. 042-1413-000

Wall-fixing aspirator for exhausted oil with pump

Composed by:

Art.020-1168-000 Air-operated pump **ratio=1:1**

Equipped with the flux adjuster and the vacuum gauge

Art.025-1265-000 Wall-fixing bracket

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes

Art.916-0411-040 spirac 4m aspiration Ø 12 M-M 1/4 - delivery hose

Art.906-0404-040 R1 1/2" hose M-F 4 m with plastic support

Art.024-1232-F00 Oil dispensing nozzle flexible end



042-1413-000 11,800 0,031 1

Art. 042-1414-000

Wall-fixing aspirator for exhausted oil with pump

Composed by:

Art.020-1168-000 Air-operated pump **ratio=1:1**

Equipped with the flux adjuster and the vacuum gauge

Art.071-1206-410 Swiveling hose reel with R1 1/2" hose 10m length

Art.025-1265-000 Wall-fixing bracket

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes

Art.906-0424-015 R1 1/2" hose F-F 1,5m length

Art.906-0404-040 R1 1/2" hose M-F 4 m with plastic support


Art.024-1232-F00 Oil dispensing nozzle flexible end




042-1414-000 30,600 0,083 2




042-1304-000



042-1413-000



042-1414-000



ATTENTION: is necessary to loosen the working of the pump through the flux adjuster to maintain the vacuum gauge in the optimal position of - 0,6.

Fixed aspiration systems active by air-operated pump, ideal for the aspiration of exhausted oil and similar from each vehicles, using the suitable probe, between the included kit of 11 probes. Wall-fixing application allow the connection to fix system for the discharge of the aspirated liquid directly to the tank of stocking.

Warning: It is not possible to suck brake oils, fuels, inflammable and corrosive liquids

AIR-OPERATED DIAPHRAGM PUMP FOR EXHAUSTED OIL



042-1415-000

Art. 042-1415-000

Aspirators with wall-fixing air-operated diaphragm pump for exhausted oil

Composed by:

Art.028-1362-000 Air-op. diaphragm pump **ratio=1:1** delivery capacity **61 l/min**

Equipped with the flux adjuster and the vacuum gauge

Art.025-1266-000 Wall-fixing bracket

Art.071-1206-410 Swiveling hose reel with R1 1/2" hose 10m length

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes

Art.906-0424-015 R1 1/2" hose F-F 1,5m

Art.906-0404-040 R1 1/2" hose M-F 4 m with plastic support

Art.024-1232-F00 Oil dispensing nozzle flexible end




042-1415-000

9,800

0,100

4



042-1416-000

Art. 042-1416-000

Aspirators support with air-operated diaphragm pump for exhausted oil

Composed by:

Art.023-1968-001 Service support

Art.028-1362-000 Air-op. diaphragm pump **ratio=1:1** delivery capacity **61 l/min**

Equipped with the flux adjuster and the vacuum gauge

Art.025-1266-000 Wall-fixing bracket

Art.070-1206-410 Swiveling hose reel with R1 1/2" hose 10m length

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes

Art.906-0424-015 R1 1/2" hose F-F 1,5m length

Art.906-0404-040 R1 1/2" hose M-F 4 m



042-1416-000

106,800

0,660

4



ATTENTION: is necessary to loosen the working of the pump through the flux adjuster to maintain the vacuum gauge in the optimal position of - 0,6.

Fixed aspiration systems active by air-operated pump, ideal for the aspiration of exhausted oil and similar from each vehicles, using the suitable probe, between the included kit of 11 probes.

Wall-fixing application allow the connection to fix system for the discharge of the aspirated liquid directly to the tank of stocking.

Warning: It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.

Art. 044-1479-000

Set 10 standard probes supplied with the oil aspirators

Composed by:

Art. 044-1480-000 Connection suitable for Volkswagen – AUDI engine-incorporated probes

Art. 044-1481-000 Connection suitable for BMW engine-incorporated probes

Art. 044-1481-B00 Connection suitable for JTD – FIAT engine-incorporated probes

Art. 044-1481-C00 Connection suitable for Citroën-Peugeot engine-incorporated probes

Art. 044-1482-000 Flexible probe Ø 5 mm 800 mm

Art. 044-1483-000 Flexible probe Ø 6 mm 800 mm

Art. 044-1484-000 Flexible probe Ø 7 mm 1000 mm

Art. 044-1485-000 Flexible probe Ø 8 mm 800 mm

Art. 044-1488-000 Metallic probe Ø 5 mm 800 mm

Art. 044-1489-000 Metallic probe Ø 6 mm 800 mm

The same probes are available as a single item

Probes by request

Art. 044-1490-000 Flexible probe Ø 8 mm 1000 mm

Art. 044-1491-000 Flexible probe Ø 5 mm 1200 mm

Art. 044-1492-000 Flexible probe Ø 6 mm 1200 mm

Art. 044-1493-000 Flexible probe Ø 7 mm 1200 mm

Art. 044-1494-000 Flexible probe Ø 8 mm 1200 mm

Art. 044-1497-000 Flexible probe Ø 8 mm 1500 mm

Art. 044-1498-000 Flexible probe Ø 12 mm 800 mm

Art. 044-1500-000 STAINLESS STEEL probe Ø 8 mm 800 mm

Art. 044-1501-000 STAINLESS STEEL probe Ø 10 mm 800 mm

Art. 044-1502-000 STAINLESS STEEL probe Ø 12 mm 800 mm


Art. 044-1479-A00

Art. 044-1505-000 Wall-fixing support for probes

Nautical specific probes

Art. 044-1506-000 3/8 connection for nautical motors

Art. 044-1507-000 3/4 connection for nautical motors

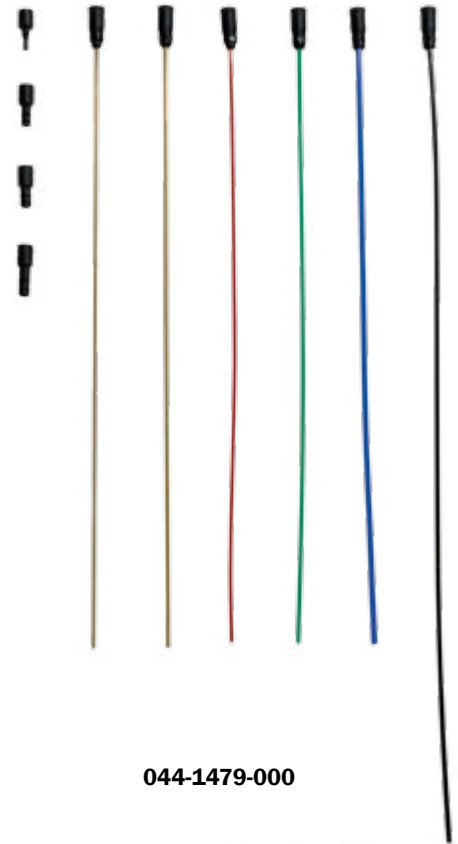

044-1479-000



044-1505-000

044-1506-000

044-1507-000

044-1490-000