


SCS-SDA

SUSPENSION LADDERS

PPE SYSTEM

MODULAR AND LIGHT WEIGHT

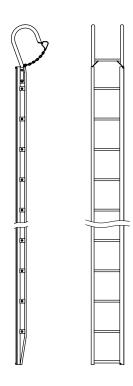

SUSPENSION LADDERS - SCS

Specifically designed for suspension works. The ladder is made of light aluminium alloy, fitted with anti-slippery rungs, with a special track for the anti-fall device and with a galvanized steel supporting hook.

MODEL	LENGTH m	SECTION LENGTH m	WORKING LOAD kg	LINEAR MASS kg/m	ANTI-FALL DEVICE model not included
SCS100	3.5	3.5	300	3.8	SDA021
SCS200	4.5	4.5	300	3.8	SDA021
SCS306	5	5	300	3.8	SDA021
SCS300	6	6	300	3.8	SDA021
SCS301	6	4+2	300	3.8	SDA021
SCS302	8	4+4	300	3.8	SDA021

AVAILABLE DEVICES

SDG015 Double swivel hook

Special models with different lengths are available upon request.



SDG015

ANTI-FALL DEVICES - SDA

They are individual protective devices to prevent the operator from falling down; they are self-guided and self-locking devices running on a special rigid track and made of light aluminium alloy. They are provided with a polyamide mini energy-absorber and safety spring catch to connect it to the safety harness; the use of the safety harness is compulsory. They allow the proper movement of the operator along the ladder and, at the same time, they protect him from falling down. End stroke devices are provided in order to avoid that the anti-fall device run away from the anchoring track. These devices comply with the 89/686/CEE European Standard related to the individual protective devices.

MODEL	WORKING LOAD	NYLON ROPE LENGTH	MASS
	kg	mm	kg
SDA021	100	300	1
SDA022	100	300	1



Pictures & drawings can be different according to technical specifications - updating programme variations without notice are possible.

Certified Quality System

Certified Environmental System ISO 14001:2015

Certified Health & Safety System ISO 45001:2018