

076 G

Voltage tester

- Tension/continuity test
- Phase/neutral identification
- Phase rotation test
- Visible and audible indication
- Tension measuring (12V ÷ 690V)
- Ideal for verifying the absence of voltage on the inverter terminals of hybrid and electric cars
- Supplied with a pair of insulated tips
- Spare parts (not included in the package):
  Spare tips (2 pieces): 701B-L
- CAT III 600 V

characteristics	size
Direct/Alternating voltage DC/AC (mV÷V)	12÷690
Frequency kHz	50÷60
Battery type (supplied)	1x9V

gr	code	
185	U00760006	1



1000 V
076 HYB

by FACOM

Digital multimeter for hybrid and electric cars

- Insulation test up to 4000 Mohm at 250V, 500V, 1000 V
- Measures AC/DC voltage and current, resistance, insulation resistance, frequency, diode, continuity
- Acoustic signal when the resistance is less than 5MΩ
- Supplied with pair of tips and contact tip with crocodile clip for insulation test
- Spare parts (not included in the package):
  Kit fuses (2 pieces): 714 A-F
  Spare tips (2 pieces): 714A-L
- CAT III 600 V

characteristics	size
Direct voltage DC (mV÷V)	400÷600
Alternating voltage AC (mV÷V)	4÷600
Direct current DC (µA÷mA)	40÷400
Alternating current AC (µA÷A)	40÷400
Resistance (Ω÷MΩ)	400÷40
Overload protection DC/AC (V)	690
Response in frequency Hz	4÷100
Battery type (supplied)	6 x 1,5V AA

gr	code	
620	U00760005	1



NEW

076 MC

Ammeter and digital multimeter

- Detectable parameters: AC/DC voltage and current, resistance, continuity, diode test, temperature, capacitance, duty cycle, and frequency
- Data hold mode on display
- Min/Max recording mode
- Backlit LCD display
- Low battery indication
- Negative polarity indication
- Overrange indication
- Automatic shutdown
- Low battery indication
- Data storage
- Supplied with a pair of test leads, thermocouple, and 3 AAA batteries
- CAT III 600 V

characteristics	size
Direct Current Voltage DC (mV÷V)	0÷600
Alternating Current Voltage AC (mV÷V)	0÷600
Direct Current DC (mA÷A)	0÷600
Alternating Current AC (mA÷A)	0÷600
Resistance (Ω÷MΩ)	0÷60
Frequency Response (Hz÷MHz)	1÷9,99
Battery Type (included)	3xAAA

gr	code	
264	U00760008	1



1000 V
077 EX

ISO 5745 EN 60900

Flat extra-long nose pliers with straight jaws - 1000 V

- Knurled gripping surface
- Open hinge with forged joint
- Insulated ergonomic bimaterial grip
- Hanging holes at the ends for safety lock systems
- Protective enamelled finish
- Each one is tested according to the European standard EN 60900 to ensure safe work
- IMQ Certification

L mm	a mm	code	
160	50	U00770103	1
200	75	U00770105	1



1000 V
077 VSE

by FACOM

ISO 5745 EN 60900

Flat extra-long nose pliers with straight jaws - 1000 V

- Knurled gripping surface
- Burnished finish
- Bimaterial layered insulation with ergonomic grip surface
- The insulation is in critical condition when the yellow layer becomes visible.
- Each one is tested according to the European standard EN 60900 to ensure safe work

L mm	a mm	gr	code	
165	50	170	U00770104	1




1000 V
079 EX

ISO 5745 EN 60900

Round nose pliers with long straight jaws - 1000 V

- Used mainly for eyelet curvature
- Smooth jaws
- Open hinge with forged joint
- Insulated ergonomic bimaterial grip
- Hanging holes at the ends for safety lock systems
- Protective enamelled finish
- Each one is tested according to the European standard EN 60900 to ensure safe work
- IMQ Certification

L mm	a mm	code	
160	52	U00790103	1

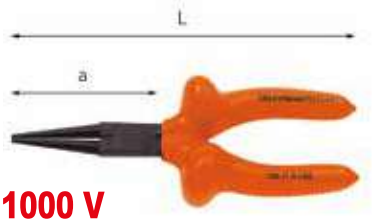

1000 V
079 VSE

by FACOM

Round long nose pliers with straight jaws - 1000 V

- Knurled gripping surface
- Burnished finish
- Bimaterial layered insulation with ergonomic grip surface
- The insulation is in critical condition when the yellow layer becomes visible.
- Each one is tested according to the European standard EN 60900 to ensure safe work

L mm	a mm	gr	code	
170	45	175	U00790105	1